

IRONING TABLES


WITH SUCTION UNIT WITHOUT BOILER

Features

- Vacuum ironing table + iron, with electrically heated board and suction.
- Adjustable temperature of the board by means of a thermostat.
- Built-in single phase suction unit.
- Working table dimensions (1.200 x 400 x 250 mm).
- Works by means of a pedal.
- Electrical heating.

FRV-A / FRV-AS / FRV-AVS

A- Vacuum
V- Up steaming
S- Blowing

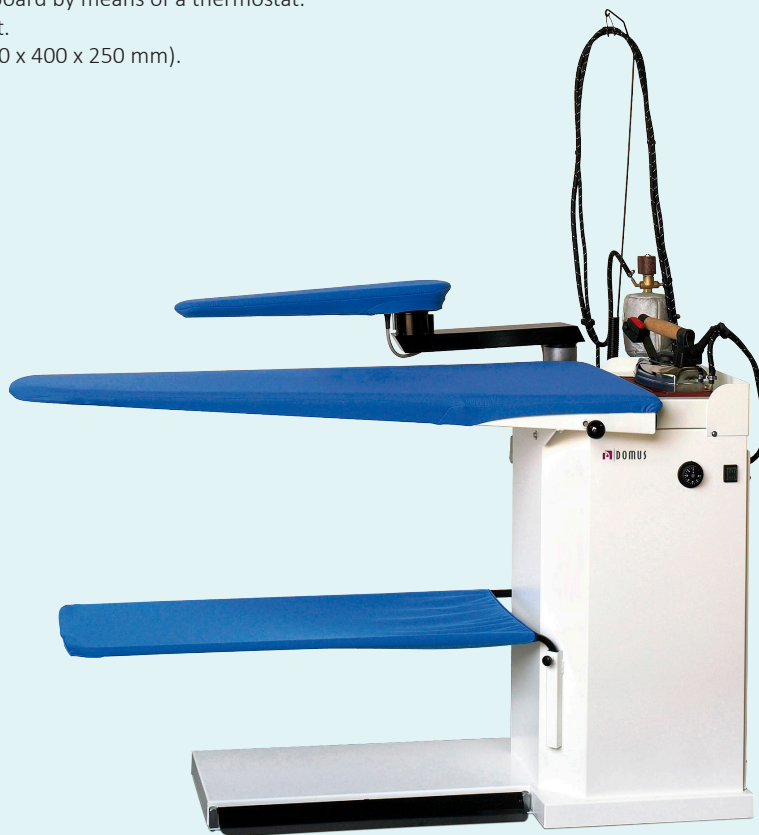

FRV-A

Options

- Sleeve arm.
- Steam gun for: FRV-A / FRV-AS / FRV-AVS.
- Sliding trolley with light for: FRV-A / FRV-AS / FRV-AVS.

TECHNICAL DATA	UNIT.	FRV-A	FRV-AS	FRV-AVS
CAPACITY				
Boiler	-	No	No	No
Boiler capacity	l	-	-	-
Board dimensions	mm	1.200 x 400 x 250	1.200 x 400 x 270	1.200 x 400 x 250
OPTIONS				
Swinging arm with suction and heated sleeve shape	-	Opt	Opt	Opt
Steam gun	-	Opt	Opt	Opt
Sliding trolley with balancer and lighting	-	Opt	Opt	Opt
Second steam iron assembly	-	Opt	Opt	Opt
POWER				
Vacuum Motor	kW	0,45	0,45	0,45
Pump Motor	kW	-	-	-
Iron Heater	kW	0,83	0,83	0,83
Board heater	kW	1	1	-
Sleeve-arm heater (option)	kW	0,09	0,09	0,09
CONNECTIONS				
Ø Water inlet	BSP	-	-	-
Ø Steam inlet	BSP	1/4"	1/4"	3/8"
Steam pressure	BAR	-	-	-
Steam Consumption	Kg/h	5	5	10-15
Ø Air inlet	BSP	-	-	-
Air pressure	BAR	-	-	-
Air Consumption	Nl/m	-	-	5
DIMENSIONES / DIMENSIONES CON EMBALAJE				
Width / Width	mm	1.480/1.520	1.500/1.520	1.680/1.880
Depth / Depth	mm	480/580	600/580	580/680
Height / Height	mm	930/1.120	1.800/1.120	920/1.270
Net weight / Gross weight	kg	66/82	78/94	110/134
Volume	m ³	3,20/5,19	3,88/6,23	4,68/7,43
OTHERS				
Voltage	Hz	230V/l/50-60Hz	230V/l/50-60Hz	230-400/1/50-60Hz
Sound level	dB	68	70	75



Primer

info@primer.es

www.primer.es

www.primerlaundry.com