

HIGH SPIN WASHER SEMI-INDUSTRIAL EQUIPMENT

Features

LC-6-8 P

- Soft mount high spin washer extractor.
- **530 G** factor (at 1.400 Rpm).
- St. steel and titanium construction.
- Door: true metal frame, 180° opening, double insulated glass.
- Drum in stainless steel, removable lifters, gentle area evacuation holes.
- Microprocessor: fixed programs, mop & microfiber programs, service menu.
- Balance control.
- Electric heating: stainless steel elements.
- Detergent compartment: prepared for chemicals for external dosing system.
- Models with outlet pump and models with drain valve.



Stainless steel



Microprocessor



Inverter



Efficient drum design



Easy maintenance



Automatic mixer (hot/cold water)



Emissions CO₂/carbon footprint



Energy efficiency



Minimum consumption of water




Low chemical consumption

Options

- Relay card for automatic dosing.
- Frequency at 60 Hz.

TECHNICAL DATA	UNIT.	LC-6 P pump	LC-6 P valve	LC-8 P pump
DRUM				
Capacity 1:10	Kg	6	6	8
Volume	l	60	60	80
GENERAL DETAILS				
Spining speed	r.p.m.	1.400	1.400	1.400
G Factor	-	530	530	530
Drain	-	Drain valve	Drain pump	Drain pump
Display languages	-	12	12	12
Construction	-	Stainless steel casing and drum		
Control	-	Electronic	Electronic	Electronic
Balance control	-	Yes	Yes	Yes
Sound level	dB	69	69	70
External coiner OPTION	-	Yes	Yes	Yes
POWER				
Motor	kW	200 (230 I) - 450 (400 III)		600
Electric heating	kW	135	168	218
Voltage	Hz	230 I / 230 / 400 III 50Hz		
R-gost approval	-	Yes	Yes	Yes
DIMENSIONS				
Width	mm	600	600	600
Depth	mm	585	585	726
Height	mm	850	850	850
Net weight	kg	73	73	92

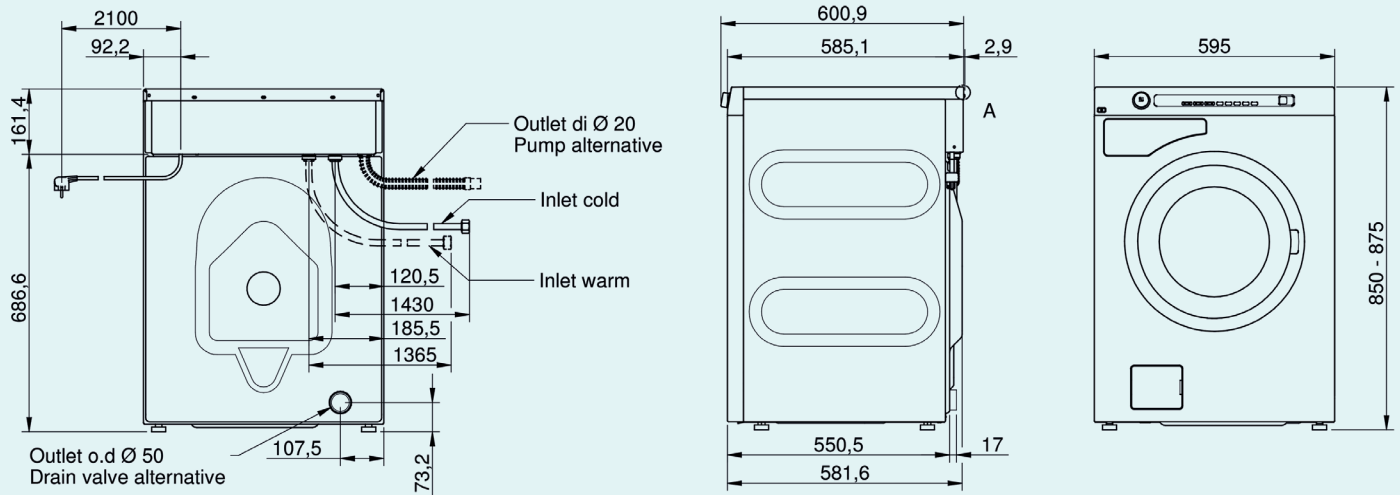

Primer

info@primer.es

www.primer.es

www.primerlaundry.com