

## TUMBLE DRYERS

THE MOST COMPETITIVE IN THE MARKET

### Features

### DL-11-17 BASIC

- Tumble dryer in galvanised steel.
- Big loading door (opening of 180°).
- Direct drive through a gearbox, no pulley.
- Time and temperature selection. Light indication of heating. (These models do not allow the moisture control option).
- Inverter: All models offer the reverse turning of the drum.
- Drum in galvanised steel.
- Radial airflow circuit.
- New filter drawer with wide surface and improved airflow.
- Cool Down: Anti-wrinkle at the end of cycle.
- Models available in electric or gas heating.



Emissions  
CO<sub>2</sub>/carbon  
footprint



Energy  
efficiency



Inverter



Easy  
maintenance




Filter

### Options

- Low pressure steam battery.
- Model versions in 60 Hz.
- Marine versions 440V III 60 Hz No neutral or 480V III 60 Hz No neutral.

TECHNICAL DATA	UNIT.	DL-11 BASIC	DL-17 BASIC		
<b>CAPACITY</b>					
Capacity 1/18	Kg	12	18		
Capacity 1/20	Kg	11	17		
Hourly Output BASIC	Kg/h	21	33		
Evaporation capacity BASIC	l/h	10,9	17,2		
<b>DRUM</b>					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	976	976		
Load hole bottom height	mm	689	689		
Drum length	mm	475	746		
Drum volume	l	210	330		
<b>POWER</b>					
Drum motor power	Kw	0,25	0,25		
Fan Motor Power BASIC	Kw	0,25	0,25		
Total Installed power BASIC	Kw	12,55	18,55		
Electric Heating (Installed power)	Kw	12	18		
Gas heating (installed Power) in KW	Kw	20,51	20,51		
Gas heating (installed el. power) BASIC	Kw	0,55	0,55		
Steam heating (Steam Power KW)	Kw	30	30		
Steam heating ( installed el. power) BASIC	Kw	0,55	0,55		
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>
Tension 230V- I + T	Nº x mm2 / A	3 x 35 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V- III + T	Nº x mm2 / A	4 x 10 / 40A	4 x 1,5 / 20A	4 x 16 / 63A	4 x 1,5 / 20A
Tension 400V- III + N + T	Nº x mm2 / A	5 x 4 / 25A	5 x 1,5 / 20A	5 x 10 / 32A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Width / Width	mm	785 / 865		785 / 865	
Depth / Depth	mm	840 / 940		1110 / 1210	
Height / Height	mm	1694 / 1840		1694 / 1840	
Height without heating battery	mm	-		-	
Net weight / Gross weight	kg	172 / 180		187 / 200	
<b>OTHERS</b>					
Max airflow BASIC	m3/h	850		850	
Ø Fume exhaust	mm	200		200	
Sound level BASIC	dB	64		64	

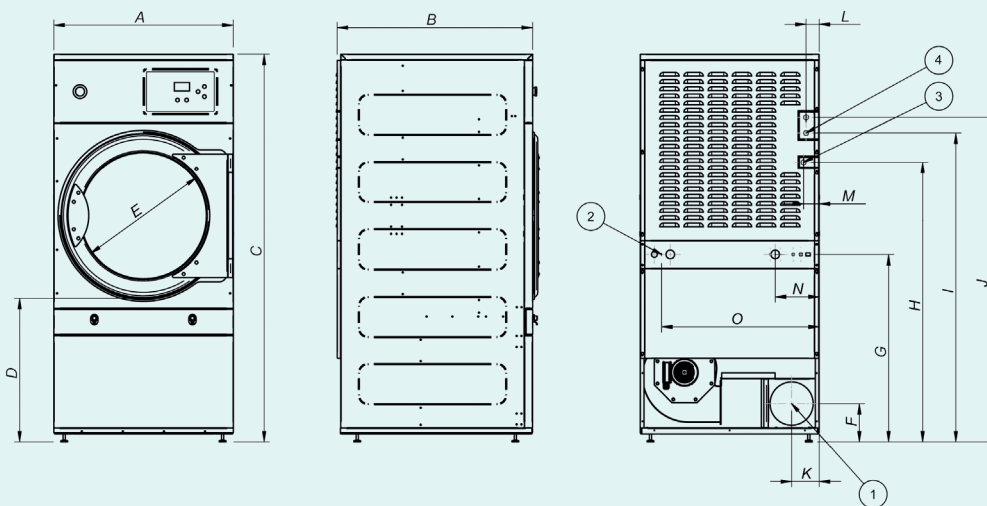

- 01. Fumes outlet
- 02. Electrical connection
- 03. Gas connection
- 04. Condensation outlet

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
DL-11	785	840	1700	618	574	168	821	1226	1354	1422	121	56	68	192	690
DL-17	785	1010	1700	618	574	168	821	1226	1354	1422	121	56	68	192	690

