

TUMBLE DRYERS

DESIGNED TO MEET ALL NEEDS

Features

- Construction in grey skinplate, stainless steel look.
- Big loading door (opening of 180°).
- Direct drive through a gearbox, no pulley.
- **Timer Range:** Analogic control with time and temperature selection. Light indication of heating. (These models do not allow the moisture control option).
- **PM Electronic Control Range:** Electronic control. Easy and intuitive to use, the electronic control offers a complete control of the process.
- Inverter: All models offer the reverse turning of the drum.
- Stainless Steel Drum as standard.
- Mixed axial-radial airflow to optimise and maximise the airflow circuit in the drum.
- Efficient Drum: The new drum with stamped holes makes sure the linen is gently handled.
- New fluff filter- big screen and easy to clean.
- Cool Down: Anti-wrinkle at the end of cycle.
- Models available in electric, gas or steam heating.
- **Self-Service:** STANDARD electronic control range have several payment options for Laundromats: to work with centralized payment systems, with coin / token, or with prepaid card systems. Electric and gas heated models.

DS-11-17 STANDARD



DS-11-17 PM

DS-11-17



Stainless steel



Microprocessor



Variator:
improves inverter
performance



Efficient drum
design



Emissions
CO2/carbon
footprint



Energy
efficiency



Dual airflow



Easy
maintenance



Filter

Options

- Smart Dry: Intelligent Moisture Control. (PM Models).
- Fire Off: Integrated Fire Extinguishing System. (PM Models).
- Double doorglass.
- Stainless steel body.
- Stainless steel front panel.
- Low pressure steam battery.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.
- Reverse door opening.




Smart dry



Fire off

TECHNICAL DATA	UNIT.	DS-11 STANDARD	DS-17 STANDARD		
CAPACITY					
Capacity 1/18	Kg	12	18		
Capacity 1/20	Kg	11	17		
Hourly Output STANDARD	Kg/h	21	33		
Evaporation capacity STANDARD	l/h	10,9	17,2		
DRUM					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	976	976		
Load hole bottom height	mm	689	689		
Drum length	mm	475	746		
Drum volume	l	210	330		
POWER					
Drum motor power	Kw	0,25	0,25		
Fan Motor Power STANDARD	Kw	0,25	0,25		
Total Installed power STANDARD	Kw	12,55	18,55		
Electric Heating (Installed power)	Kw	12	18		
Gas heating (installed Power) in KW	Kw	20,51	20,51		
Gas heating (installed el. power) STANDARD	Kw	0,55	0,55		
Steam heating (Steam Power KW)	Kw	30	30		
Steam heating (installed el. power) STANDARD	Kw	0,55	0,55		
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V- I + T	Nº x mm2 / A	3 x 35 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V- III + T	Nº x mm2 / A	4 x 10 / 40A	4 x 1,5 / 20A	4 x 16 / 63A	4 x 1,5 / 20A
Tension 400V- III + N + T	Nº x mm2 / A	5 x 4 / 25A	5 x 1,5 / 20A	5 x 10 / 32A	5 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		3/4"	
Ø Condensed (Steam models)	BSP	3/4"		3/4"	
DIMENSIONS / PACKING DIMENSIONS					
Width / Width	mm	785 / 865		785 / 865	
Depth / Depth	mm	840 / 940		1110 / 1210	
Height / Height	mm	1694 / 1840		1694 / 1840	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	172 / 180		187 / 200	
OTHERS					
Max airflow STANDARD	m3/h	850		850	
Ø Fume exhaust	mm	200		200	
Sound level STANDARD	dB	64		64	

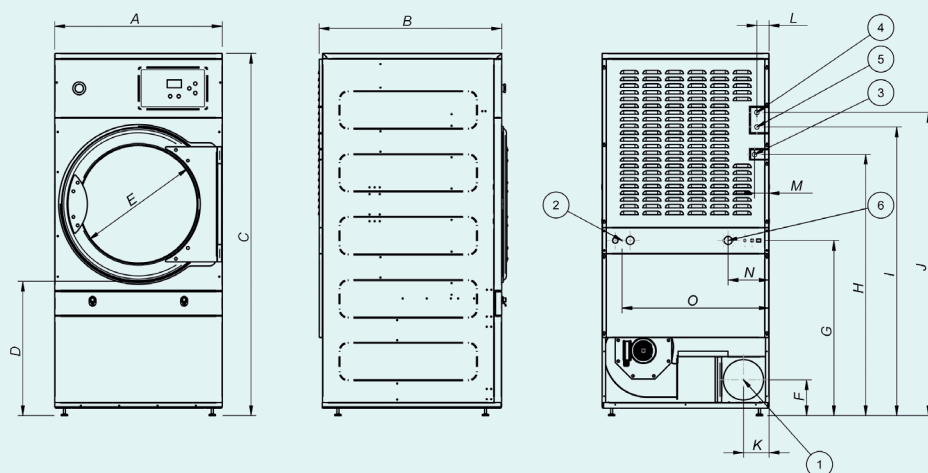

- 01. Fumes outlet
- 02. Electrical connection
- 03. Gas connection
- 04. Steam connection
- 05. Condensation outlet
- 06. Anti fire water valve

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
DS-11	785	840	1700	618	574	168	821	1226	1354	1422	195	56	68	192	690
DS-17	785	1010	1700	618	574	168	821	1226	1354	1422	195	56	68	192	690

